


SGM-FL-120W(SP series)

High Efficiency Flexible Solar Modules



— Surface ETFE —

Module Diagram

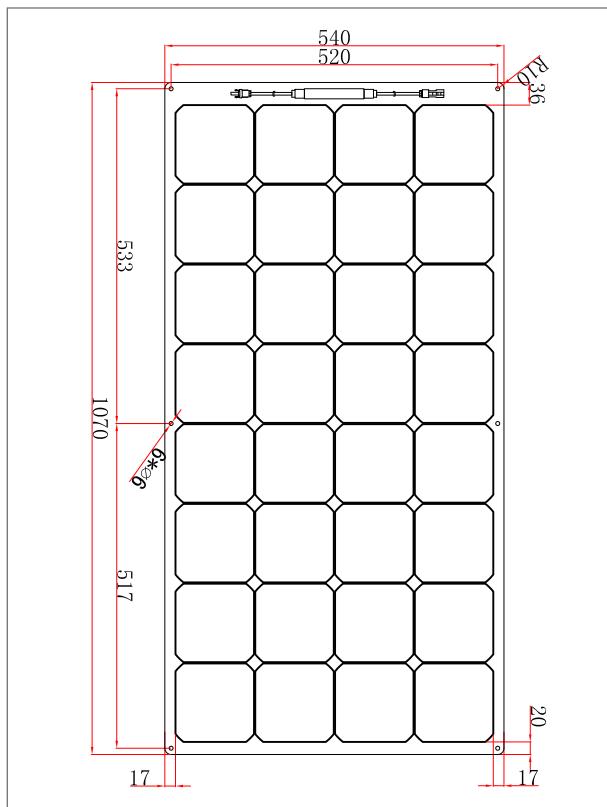

Electrical Characteristics

Maximum power(Pmax)	120W
Open-circuit voltage(Voc)	23.4
Voltage at Pmax(Vmp)	19.8
Short-circuit current(Isc)	6.41
Current at Pmax(Im)	6.05
Cells Efficiency(%)	24.40%
The maximum system voltage	45VDC(IEC)
Power temperature coefficient	-0.32%/°C
Voltage temperature coefficient	-1.8mv/°C
Output power tolerance	±3%
Operating Temperature	-10~60°C

Specifications

Solar cell brand	Sunpower
No.of cells and connections	32(4*8)
Module dimension	1070*540*3mm
Weight	2.18KG
Waterproof junction box	IP65/IP67
Warranty	1 year and service life 10 years

SP-110W (Also suitable for this model)

Shenzhen Sungold Solar Co.,Ltd
Tel:86-(0)-755-29685821
Fax:86-(0)755-29685820